

# Assembly Instructions

## Suitable for Wall Lamps

Please read the instructions carefully before starting work and retain for future reference.

Always turn off the mains supply at the consumer unit, shut off the Circuit breaker or remove the circuit fuse before commencing installation.

This fixture should only be installed by a qualified electrician.  
This fixture is suitable for indoor use only.

### Installation: (see FIG.1)

1 Position the mounting bracket (E) centrally onto the wall (A) and mark through the fixing holes onto the wall. Check that there are no hidden cables at these positions and drill pilot holes for screws (D) into the wall (A). (Please use correct type of screws or wall anchor for wall).

2 Insert two suitable wall anchors (B) into the pilot holes in the wall (A).

3 Align the fixing holes in the mounting bracket (E) with the pilot holes, and secure the mounting bracket (E) with two screws (D).

4 Make electrical connections in the terminal block (C) as follows: (see FIG.2 only this step)

- Connect the BROWN wire from the fitting to the BROWN/RED (live) wire of the supply cable.
  - Connect the BLUE wire from the fitting to the BLUE/BLACK (neutral) wire of the supply cable.
  - Connect the GREEN/YELLOW wire from the fitting to the bare ground wire in the supply cable, sometimes covered along its exposed length with GREEN/YELLOW SLEEVING.
- If there is more than one supply cable present, seek professional advice.

5 Check that the terminal screws are tightened securely and that there are no stray wires, or bare cable present.

6 Raise the front plate (F) to the mounting bracket (E), and then secure the front plate (F) with the screws (G).

7 if you are installing shades (not provided) then using short tube (H), or else using longer tube (K). Place shade over socket (I), then secure shade with retaining ring (J).

8 Install bulbs (not provided) to sockets (I).

9 Install light bulbs.

**Do not exceed the maximum wattage recommended on lamp holder.**

**If the external flexible cable of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.**

*Interiors 1900*

New Classics  
Collection

Fig 1


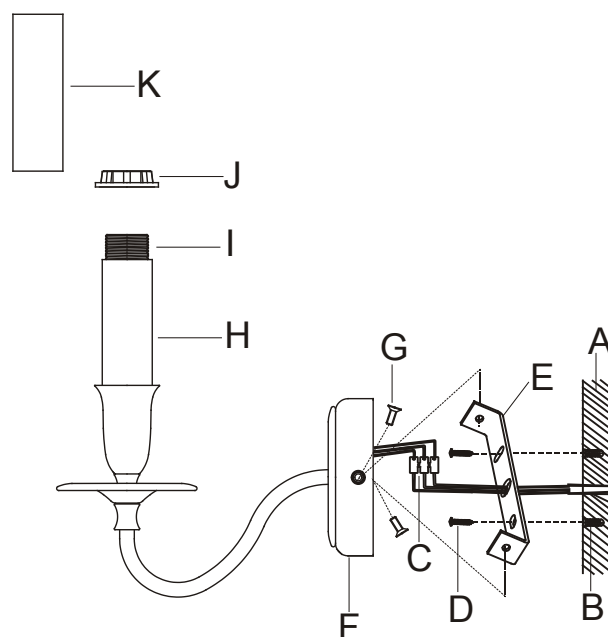


Fig 2

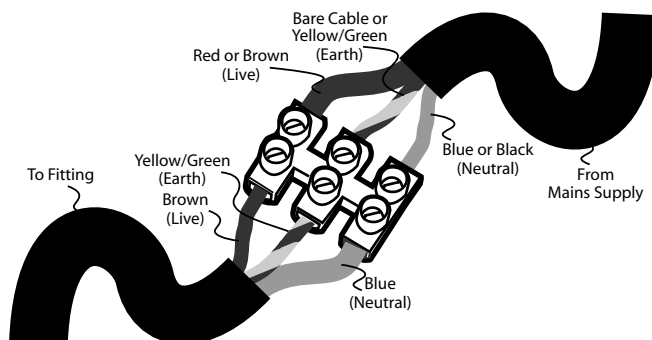

**If in any doubt about wiring, consult an electrician.**