

Assembly Instructions

Suitable for CA20P5 and CA20P9

Please read the instructions carefully before starting work and retain for future reference.


Always turn off the mains supply at the consumer unit, shut off the Circuit breaker or remove the circuit fuse before commencing installation.

This fixture should only be installed by a qualified electrician.

This fixture is suitable for indoor use only.

1. Place the crystal and metal central column (A) onto the exposed thread (B) on the top of the main lamp assembly. (C) Pull the cable (D) and tighten the metal column (A) carefully onto the main assembly taking care not to damage the Cable (D). Attach bottom decorative crystal (E) in the same way to the bottom exposed thread)


2. Determine the amount of chain needed and shorten the chain using chain pliers being careful not to scratch the finish. Double check that the drop is correct before trimming the cable ensuring there is an adequate excess to allow for wiring and that the cable is not strained. Thread the cable loosely through the chain (every 3 or 4 links) and finally through the top metal hook (F).

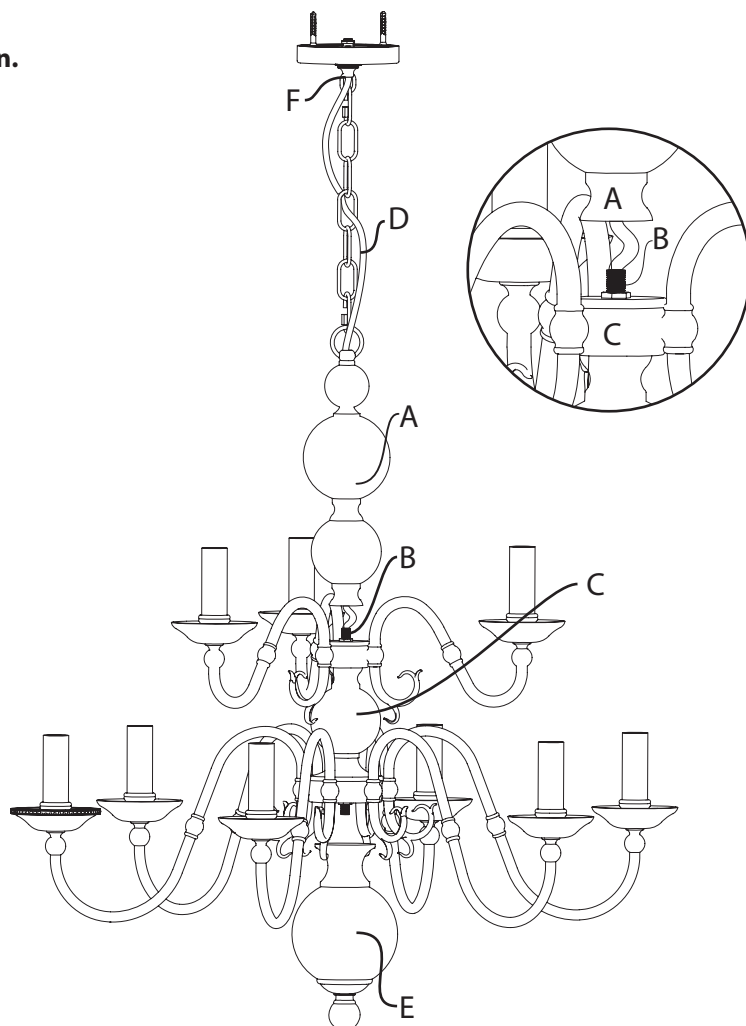

3. Attach the ceiling plate to the ceiling using appropriate wall plugs and screws. If screws are provided ensure they are suitable for your ceiling construction, if in doubt purchase new screws and wall plugs.

Ensure there is an adequate void to complete the wiring in the ceiling. Mark the ceiling and ensuring you do not hit any wires, drill and screw the ceiling plate to the ceiling. Ensure this plate is well secured to the ceiling and the ceiling is strong enough to support this product.

4. Make sure the locking ring, large hook and ceiling rose are placed onto the chain of the fitting before proceeding. Carefully thread the cable through the chain, locking ring, ceiling rose and large hook, then through the threaded rod. Wire the fitting as described overleaf. The fitting must be fully supported whilst wiring to ensure the cable is not strained or damaged.

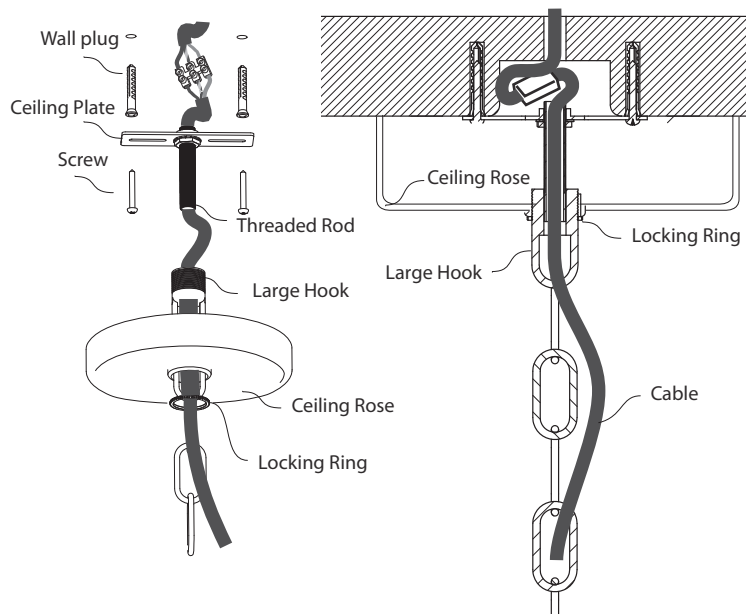

New Classics Collection

5. To wire the fitting:

- Ensure mains supply is switched off
- Using a connector block, or similar (not provided), connect the following cables
 - The earth (green&yellow) from the fitting to the earth (green&yellow) from the mains supply.
 - The neutral (blue) from the fitting to the neutral (blue or black) from the mains supply.
 - The live (brown) from the fitting to the live (red or brown) from the mains supply.

Before proceeding please ensure:

- That the insulation goes right up to terminal
- That no bare wire is showing.
- All terminal screws are fully tightened and each wire is secure.
- Only the Yellow/Green Earth wire should be on the outside of the insulation box



Close the insulation box and ensure that there are no single insulated wires exposed outside the insulation box.

Once wired fit the large hook to the threaded rod, then place the ceiling rose over the large hook, secure with the locking ring. Ensure that the threaded rod is secure in the large hook.

6. Your chandelier is supplied with two sets of sleeves, the short sleeve enables the use of the shade ring to accommodate soft shades (sold separately) and the long sleeve is to be used with 'bare bulbs'. These can easily be swapped by removing the shade ring.

Finally add the bobèche trim to each bobèche.

Insert the correct bulbs as marked on the bulb holders (No greater than 40watt.) Turn on the electricity and test the fitting. If the fitting does not light or trips. Turn off the electricity immediately and consult an electrician.

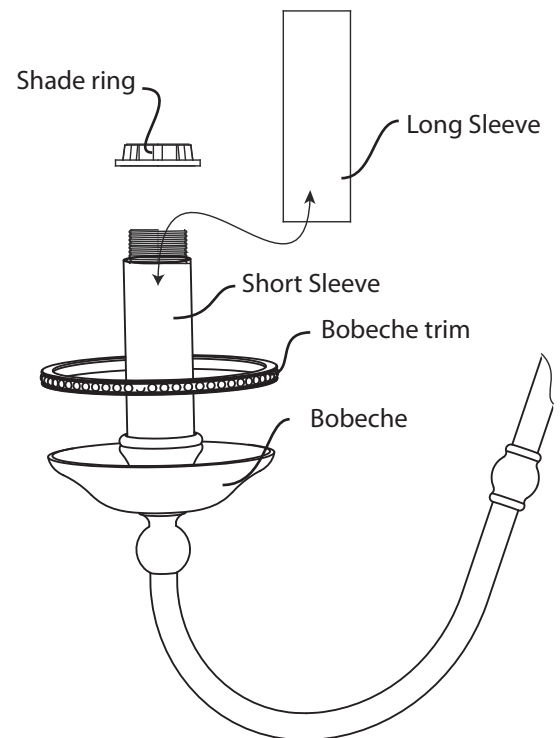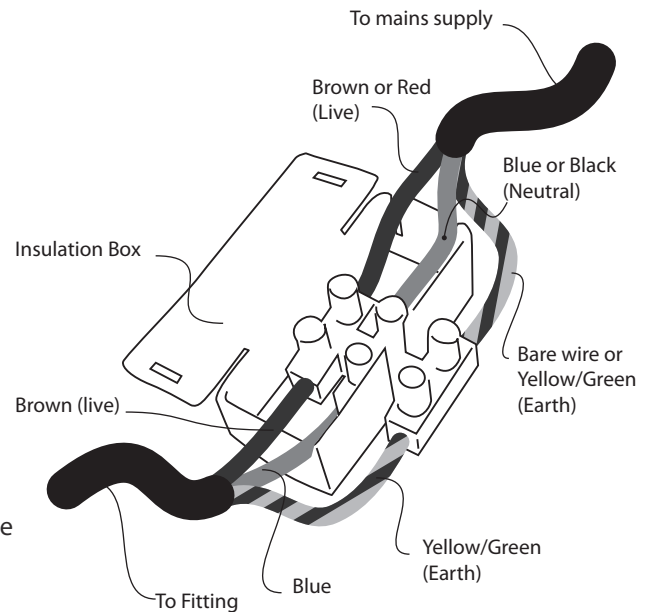

If the external flexible cable or cord of this Luminaire is damaged it should be exclusively replaced by the manufacturer or his service agent or a similar qualified person.



Suitable for indoor use only.