



LEONIS 3-KIT IP65 | DOWNLIGHT/RECESSED | WHITE

49160101

nordlux®

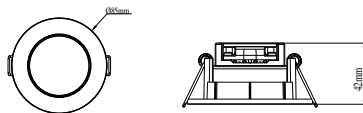

Cutout: 68-76mm

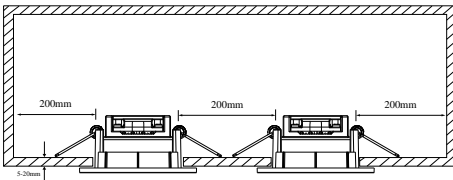

Voltage (V): 230 Volt
IP degree if the fixture includes
two types of IP degree: IP65
Class (Class I, Class II, Class III):
Class 2 (Double isolated)
Lampholder type (eg, E27/E14,
etc): LED Module
Dimmerable: True
Parallel connection possible?:
True

Primary material: Plastic

Color: White
Built In Spot Diameter (cm): 8.5
EAN: 5701581466180
TUN: 2049711
Item Number: 49160101
Pcs Per Master Carton: 3
Sales Box Height (cm): 13

Sales Box Width(cm): 13
Sales Box Depth (cm): 9
Sales Box Volume m³ : 0.0015
Net weight of the luminaire (kg):
0.23

Useful Lumen (lm): 345
Color Temperature (K): 2700
Ra-value : 80
Lifetime (h): 20000
Spread Angle (°) (beam angle of
luminaire): 110
Candela (cd) (for directional
lamp only): 0

- Parallel connection possible
- Ideally suited for bathroom zone 1-2 IP65
- Integrated connector block
- Parallel connection possible

Leonis is a single downlight with a low installation height. The downlight has an integrated LED and a frame in white plastic which contributes to a long life and low energy consumption. Furthermore, the downlight has opal white diffuser glass, that allows light to spread beautifully throughout the room. It is quick and easy to install Leonis via a screwless plug-in connection and twist-lock system. In addition, the downlight has a flexible cutting diameter (Ø68-73/76mm) and allows for parallel connection.

The downlight emits a warm light of 2700 K, which makes it particularly suitable in the living room, the dining room or the bedroom. The high degree of protection, IP65, makes Leonis highly suitable for e.g. the bathroom, as it will tolerate a humid environment.

www.nordlux.com