


2 x 60W Max E14 SES (required)  
Dimmable  
**FCL-25909X2**

### Wiring

Having identified the household wiring from your existing light fitting, connect to the connection block inside the product in the following way:

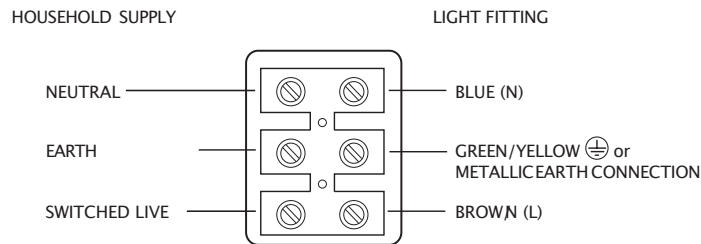

### Check that...

- You have correctly identified the wires.
- The connections are tight.
- No loose strands have been left out of the connection block.
- When completed, ensure that there are no bare or loose strands of wire exposed, and cover all exposed areas of the connection block with 2 layers of insulation tape.

### Commissioning

- Ensuring the lampholder points upwards, fit the product to the strap. Tighten the side screws to secure.
- Replace fuse or circuit breaker and switch on. Your light is now ready for use.

### Attaching the Shade

- 1) Add a rubber washer (B) to each thread of fixing plate (A)
- 2) Locate the threads of fixing plate (A) through glass plate (C) and add two more washers (B).
- 3) With the glass plate protected both sides by washers, locate the threads through the bracket (D) and fix in position by screwing on finials (E) to each thread.
- 4) Tighten finials by hand to hold glass securely. Do not overtighten.

