


## Assembly Instructions Winchester Double Wall Light

Interiors 1900

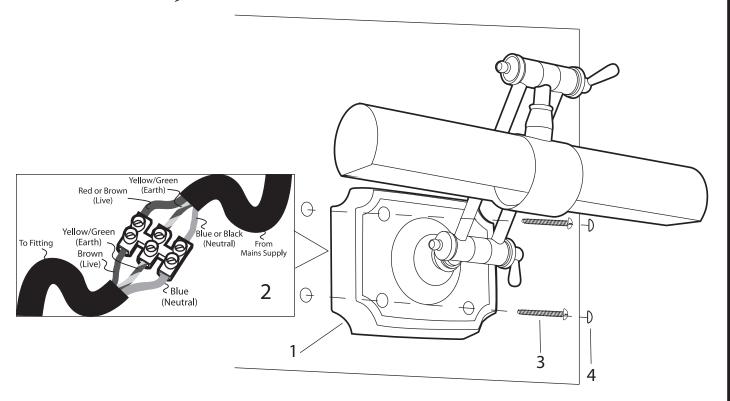

- This product is only suitable for connection to a 240V~50Hz supply in accordance with current IEE wiring regulations. It should be installed in accordance with local building regulations and is for domestic wall use only. It is are not suitable for a bathroom location.
- Before installing your light fitting always switch off the mains supply and remove the appropriate fuse or switch off the
  appropriate circuit breaker before commencing installation.
- This is a Class I, Earthed, product and <u>must</u> be connected to Earth. The terminal blocks are supplied according to requirements of the fitting.
- Never fit bulbs of a higher wattage than those specified on the label, as these may cause overheating and damage the fitting.
- If you are in any doubt about your competence please consult a qualified electrician.
- If any modification is made it will invalidate the warranty and may render the product unsafe.
- This fitting is solid brass and can be cleaned with a soft damp cloth. Do not use abrasive cleaners as this may damage the finish.
- 1. Decide on the position of the light fitting, or remove existing light fitting. Note the position of the electrical connections. Ensure there is a solid mounting surface, preferably a wooden joist or joist bridge to support the weight of the light fitting.
- 2. Use the wall cup (1) as a template to mark and make the screw holes.
- 3. Support your fitting and connect the house wiring to the terminal block (2) see expanded wiring details. **NOTE: This is a Class I fitting and must be earthed.** The 4th terminal block connector is used for the "loop" wires of the "Ring Circuit". There may be more than one set of cables in the "loop" connections. If there is a "Ring Circuit" and you do not understand the connections you must consult an electrician. Any loose terminal blocks not secured to ceiling cup should always be covered with 2 layers of good quality insulation tape.

www.interiors1900.co.uk





## Assembly Instructions Winchester Double Wall Light

## Interiors 1900

- 4. Slot the screws (3) through the front of the wall cup and attach the fitting to the wall. Place the decorative caps (4) over the screw ends
- 5. Fit the appropriate bulbs. **Do not fit a higher wattage or different shaped bulb from that mentioned on the bulb holder, as this could cause over-heating and damage the lamp.**
- 6. Turn on and test that the light illuminates.
- 7. To adjust the lamp arm and head, switch off and wait at least 10 minutes for the fitting to cool. Loosen the handles and move one section at a time into the desired position, then retighten the handles. Ensure the fitting has been supported through the whole process.

