

Marshall Table Light

INSTRUCTION MANUAL

Safety Warnings

- This product is only suitable for connection to a 240V~50Hz supply. It is for indoor use only, and not suitable for a bathroom location.
- This fitting is a Class II, Double Insulated product under an earth. Live or Neutral must not be connected to Earth.
- Do not plug into the mains until your lamp is fully assembled. It must be used on a stable, flat surface.

Under no circumstances must this table lamp be covered with any material as this could pose a safety hazard. This product is not suitable for persons under 14 years of age.

 Never fit bulbs of a higher wattage than those specified on the label as these may damage the fitting. Allow 10 minutes to cool before replacing, adjusting

or cleaning.

 Clean with a dry cloth only. Do not use liquid or abrasive cleaners on this product.

The lamp must be protected by a 3 amp fuse in the mains plug.

 If the mains cable becomes damaged it must only be replaced by a technically competent, qualified person.

· If you are in any doubt about your competence please consult a qualified electrician.

This product may contain delicate parts – be careful during handling and maintenance to avoid breakage.

· If any modification is made, it will invalidate the warranty and may render the product unsafe.

Assembly/ User Instructions

Before you start

Please read these instructions carefully before fitting and retain for reference. Check the packaging and make sure that you have all the required parts. Follow each assembly step in order to prevent incorrect assembly. Ensure that the product is fully assembled as illustrated before use.

These assembly diagrams are intended as a guide - if in doubt consult a qualified electrician.

1. Do not attempt to plug in or use this product until it has been fully assembled. Disconnect from mains during assembly or maintenance.


2. Carefully remove all packaging from the base section, central tubes and lampholder and place on a stable, flat surface.

- 3. Fit the arm to the base (1) and secure in place with the locking screw (2).
- 4. Fit the screw and nut to the head plate (3).
- 5. Fit the springs (4/5) by locating one loop around the screw head and stretching the spring to hook the other end over the corresponding screw.

6. Attach the shade (6) to the lamp by removing the shade ring (7) from the lampholder. Place the shade over the lampholder and refit the shade ring. Tighten to secure the shade in place.

- 7. Install the bulb (8 not supplied). Do not install a bulb with a greater wattage or different shape than specified on the label.
- 8. Plug in. Operate the inline switch to turn your lamp on.

If your lamp will not illuminate, please check the bulb, the 3 amp fuse in the plug and ultimately check the relevant fuse in your fuse box. If unsuccessful please consult your retailer. Class II Plug Wiring Diagram

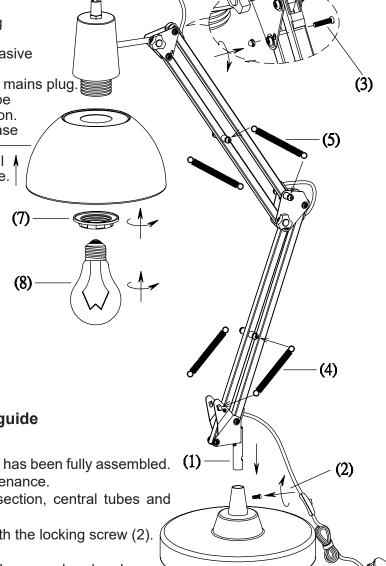

Fuse

Brown

(Live)

90532 90561-Marshall-TL 20190905

Blúe

(Neutral)

(3 AMP)