



ROCHAMP


- This product is only suitable for connection to a 240V~50Hz supply in accordance with current IEE wiring regulations. It should be installed in accordance with local building regulations and is for domestic ceiling use only. It is not suitable for a bathroom location.
 - Before installing your light fitting always switch off the mains supply and remove the appropriate fuse or switch off the appropriate circuit breaker before commencing installation.
 - This is a Class II product, and **must NOT** be Earthed, and neither the Live nor Neutral must be connected to Earth. The terminal blocks are supplied according to requirements of the fitting.
 - Never fit bulbs of a higher wattage than those specified on the label, as these may cause overheating and damage the fitting.
 - If you are in any doubt about your competence please consult a qualified electrician.
 - If any modification is made it will invalidate the warranty and may render the product unsafe.
1. Position the mounting bracket(s) (E) centrally onto the wall and mark the fixing holes onto the wall. Check that there are no hidden cables at these positions and drill pilot holes into the wall. (Please use correct type of screws or wall anchor for wall). Insert suitable wall anchors (B) into the pilot holes in the wall, & secure bracket to the wall (D).
 2. Make electrical connections in the terminal block (C) as shown in Fig. 2. Close the terminal box and check that all the insulation is inside the terminal box and there are no trapped wires. Ensure the terminal box is firmly closed. Place the terminal box and wiring inside the wall making sure not to damage any cables.
 3. Raise the fitting (F) to the mounting bracket, and then secure with the fitting screws (G).

Fig 1

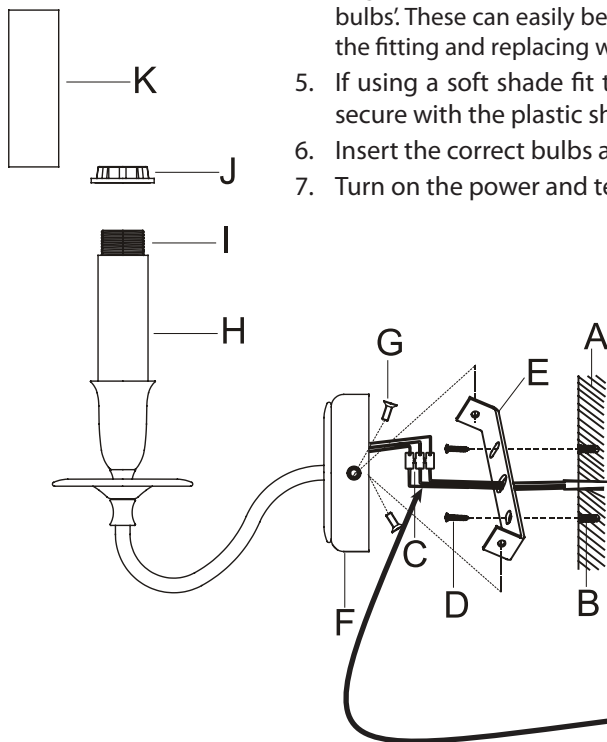

4. Your wall lamp is supplied with two sets of sleeves; the short sleeve (H) enables the use of the shade ring to accommodate soft shades (sold separately) and the long sleeve (K) is to be used with 'bare bulbs'. These can easily be swapped by removing the shade ring (J), unscrewing the candle drip from the fitting and replacing with the alternative candle drip.
5. If using a soft shade fit the shorter candle drips. Position the shade on the bulb holder (I) and secure with the plastic shade ring.
6. Insert the correct bulbs as marked on the bulb holders.
7. Turn on the power and test.

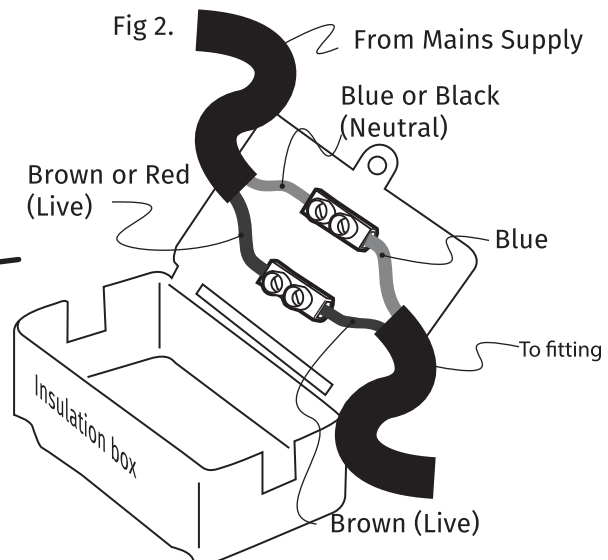

 Suitable for indoor use only.

www.interiors1900.co.uk

Lighting Association Accredited
LS9 OSE 09/06/2017